



Anytone AT408 for Car

Product Description

Mobile GSM repeater for Car AnyTone AT408 is specially designed to amplify GSM signals in **vehicles** while you ☐☐☐ on the go. The repeater works at a frequency **900 MHz** which is the most spread frequency among **European mobile providers**.

After you install the booster in your vehicle (car, truck, bus, etc) you won't ☐☐ care in which country region the connections are good or bad. Cellular signal in your car will always be at maximum.

The work of AT408 booster doesn't ☐☐ depend on a certain mobile provider. It will amplify GSM signal of any provider which functions at **900 MHz**.

The repeater is **safe for humans** as it doesn't emit any radiation when functioning.

Buy AT408 now and enjoy reliable mobile communication being at the wheel!

Product Features

- ✓ Indoor coverage – auto m2
- ✓ Frequency bandwidth of 900 MHz
- ✓ Safety for Human Health
- ✓ Conformity to CE and RoHS standards
- ✓ 2-YEAR Warranty
- ✓ Full duplex mode (improvement of outgoing and incoming signal)



Package

- AT408 (with socket for cigar lighter);
- Out-of-car antenna (3-m cable included),
- In-car antenna,
- Mounting for out-of-car antenna,
- Manual


Specification

Indoor coverage

auto m2

Up-link freq	890 - 915 MHz
Down-link freq	935 - 960 MHz
Up-link Gain	45 dB
Down-link Gain	35 dB
Power supply	12V-35V / 10mW
Working t°C	-25 - +55 C
Humidity	5-95 %
Size (mm)	122x84x33
Booster Weight	1.1 kg
dBm	10 kg

Installation Scheme

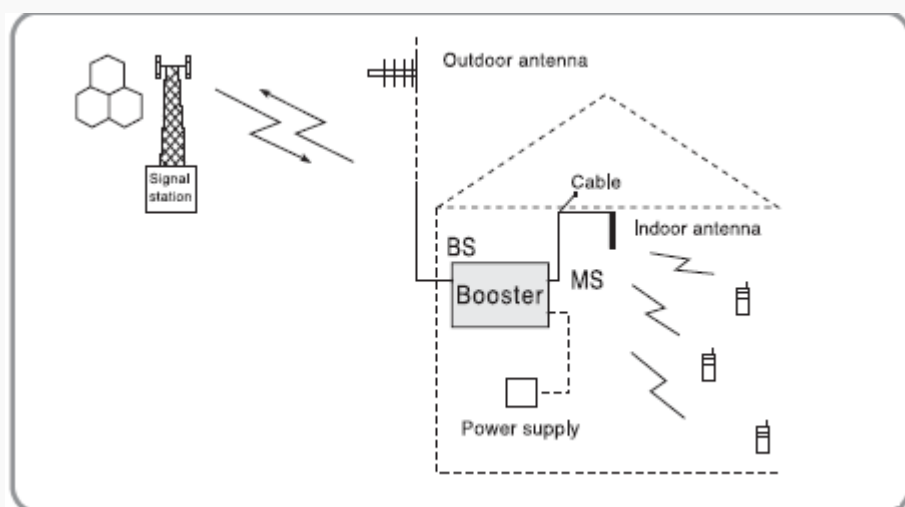

Installation Guide

1. Encuentre la mejor posición para la antena exterior (en el tejado o fuera de la ventana donde se captan por lo menos 2-3 rayas de la cobertura móvil). Elija la mejor dirección para la antena – se recomienda dirigirla hacia la torre repetidora más cercana de su operador móvil. No monte la antena exterior cerca de antenas de alta frecuencia, redes de metal, cables de alta tensión o transformadores. No se olvide de proteger la antena de tormentas o rayos.
2. Plug the in-car antenna into the repeater surface and tighten it.
3. Open the back carriage of the vehicle to mount the out-of-car antenna. Loosen two screws of the mounting for out-of-car antenna, then embed the mounting into the cover of the back carriage and tighten well.
4. Plug the out-of-car antenna into the repeater surface and fasten the screws.
5. Plug the equipment into the cigar lighter. The indicator starts lighting which means that the mobile repeater works normally. If you don't need to use the mobile repeater, unplug it from the cigar lighter.

If you have any questions regarding placing an order, installation or other issues, please, contact us –

Phone: +(33)977215553

E-mail: contact@myamplifiers.com

Skype: gsm_amplifier