



Telephony Card

AX-1600P

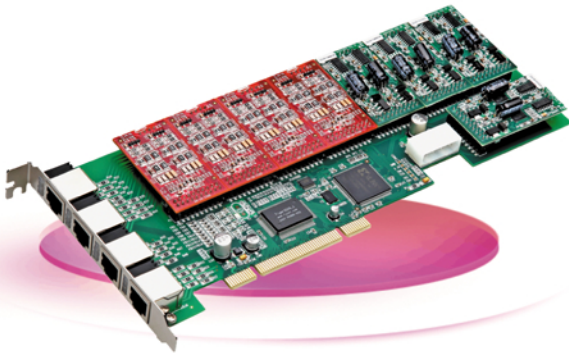

AXE-1600P

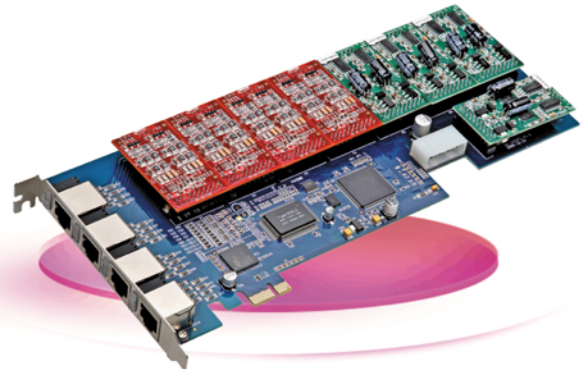

■ Overview of the AX1600P/AXE1600P

AX1600P/AXE1600P Asterisk card is the telephony PCI/PCI-E card that supports up to 16 FXO/FXS ports. Using AX1600P/AXE1600P analog card, open source Asterisk PBX and stand alone PC, users can create their telephony solution which include all the sophisticated features of traditional PBX, and extend features such as voicemail in IP PBX. The FXO and FXS modules are interchangeable to suit various requirements.

■ Applications

- IP PBX
- IVR system
- Small Office Home Office
- Traditional Calls/VoIP /Calls Conference

■ Features

- Analog card for Asterisk PBX
- Support Zaptel and Dahdi driver
- Support up to 16 FXO/FXS analog channels
- Suitable for IPPBX / VoiceMail / IVR.
- Caller ID and Call waiting
- Call Conference

■ Hardware Requirement

- 500-Mhz Pentium III
- 64MB RAM
- AX1600P: 3.3V or 5V PCI 2.2 slot
- AXE1600P: PCI-E slot

■ Dimension

- AX1600P: 264mm (length) × 103mm (height)
- AXE1600P: 264mm (length) × 110mm (height)