

Jabra[®]
YOU'RE ON

JABRA EVOLVE 65



User Manual

jabra.com/evolve65



A BRAND BY

GN Netcom

© 2014 GN Netcom A/S / GN Netcom US, Inc. All rights reserved. Jabra® is a registered trademark of GN Netcom A/S. All other trademarks included herein are the property of their respective owners. The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by GN Netcom A/S is under license.

Made in China
MODEL: HSC018W
FCC ID: BCE-HSC018W
IC: 2386C-HSC018W



Declaration of Conformity can be found on
www.jabra.com/CP/US/declarations-of-conformity

1. WELCOME	4
2. JABRA EVOLVE 65 OVERVIEW	5
2.1 STEREO VARIANT	
2.2 MONO VARIANT	
2.3 OPTIONAL ACCESSORIES (STEREO AND MONO)	
3. HOW TO WEAR.....	7
3.1 STEREO AND MONO	
3.2 ADJUST THE HEADBAND	
3.3 POSITION THE MICROPHONE	
3.4 STORING THE MICROPHONE	
4. HOW TO CHARGE THE BATTERY	10
5. HOW TO CONNECT.....	11
5.1 CONNECT TO PC (USING JABRA LINK 360)	
5.2 CONNECT TO MOBILE DEVICE (USING BLUETOOTH)	
5.3 CONNECT TO PC (USING USB CABLE)	
6. HOW TO USE	14
6.1 CALLS	
6.2 MULTIPLE CALL HANDLING	
6.3 BUSYLIGHT	
7. SUPPORT	18
7.1 FAQ	
7.2 HOW TO CARE FOR YOUR HEADSET	
8. TECHNICAL SPECIFICATIONS	19

1. WELCOME


Thank you for using the Jabra Evolve 65. We hope you will enjoy it!

JABRA EVOLVE 65 FEATURES


- Connects to PC via Jabra Link 360 bluetooth adapter or USB cable
- Connects to mobile devices via Bluetooth
- Integrated busylight
- Discreet microphone boom-arm that integrates into the headband when not on calls
- Superior music and voice capabilities
- Hi-Fi Sound

2. JABRA EVOLVE 65 OVERVIEW


2.1 STEREO VARIANT

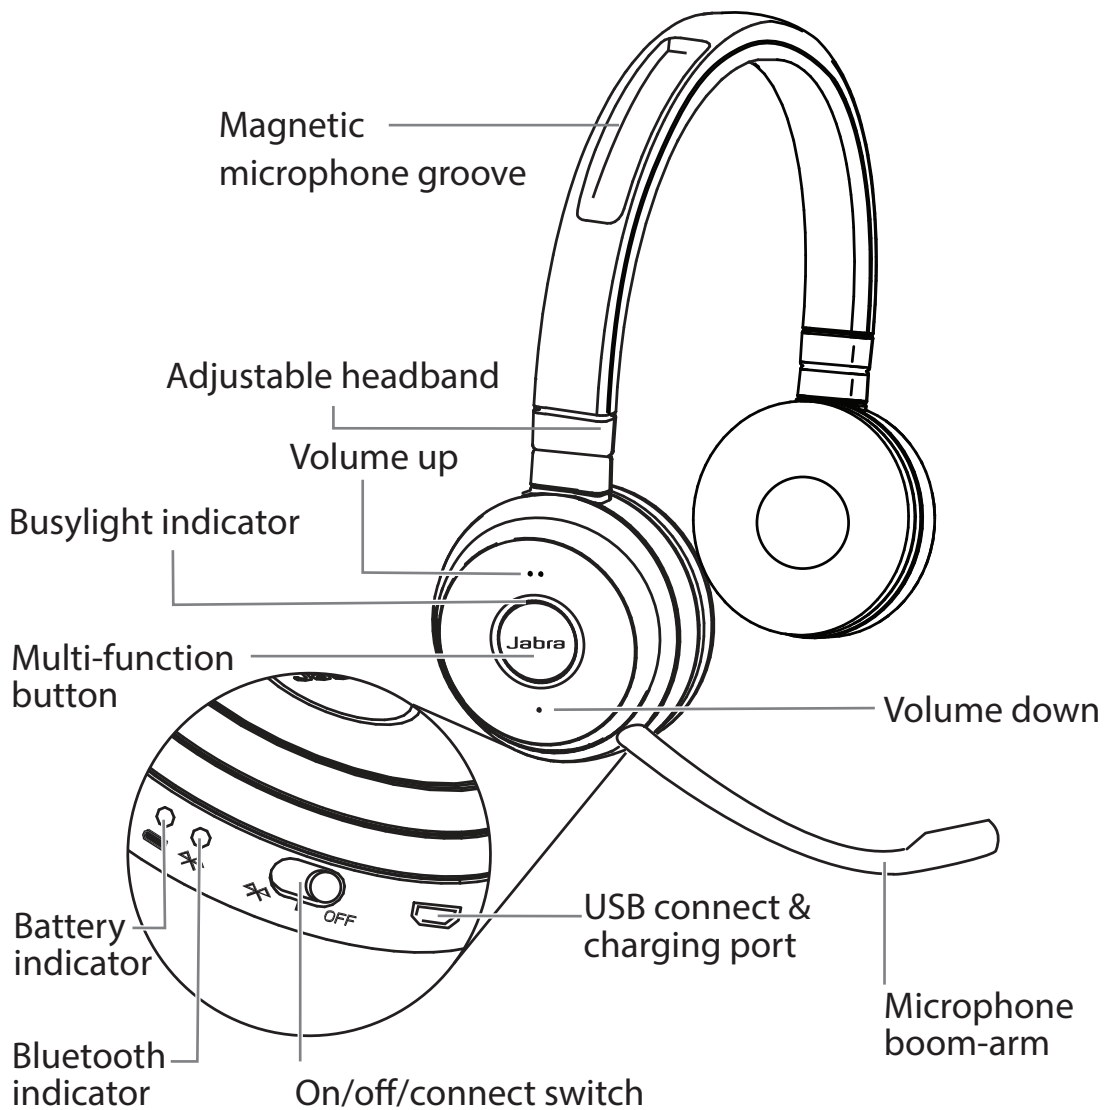


2.2 MONO VARIANT

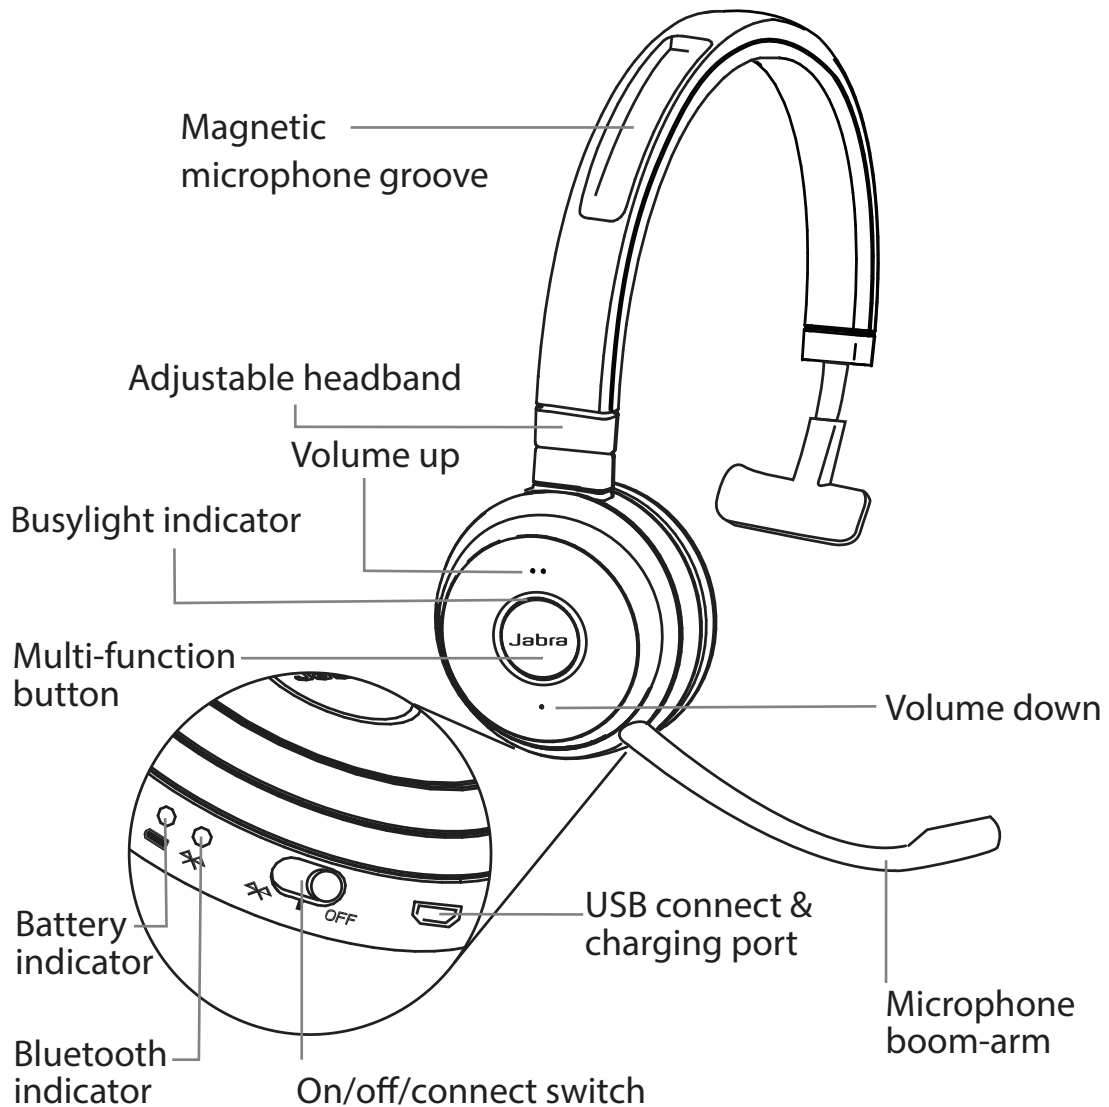

2.3 INCLUDED ACCESSORIES (STEREO AND MONO)




Carry pouch




USB cable

3. HOW TO WEAR

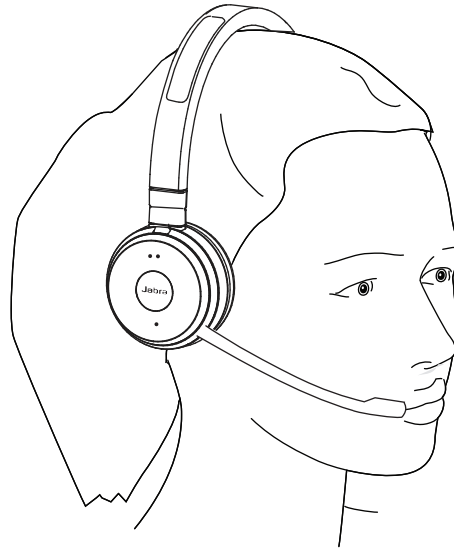


3.1 LEFT OR RIGHT WEARING STYLE

The Jabra Evolve 65 can be worn on the left or right by flipping the microphone to the other side (270° limit).

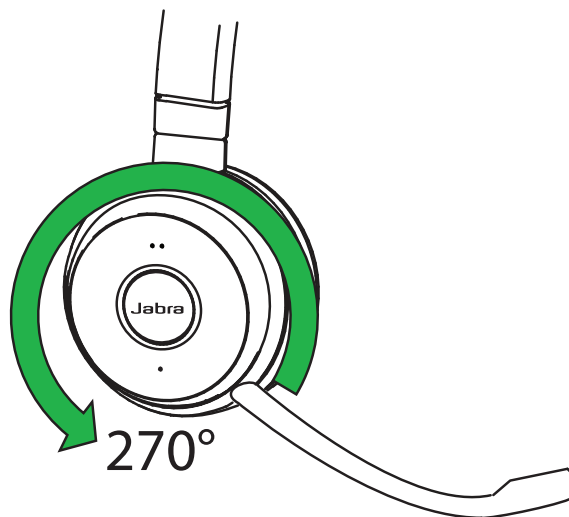

3.2 ADJUST THE HEADBAND

Adjust the headband to find the most comfortable fit.

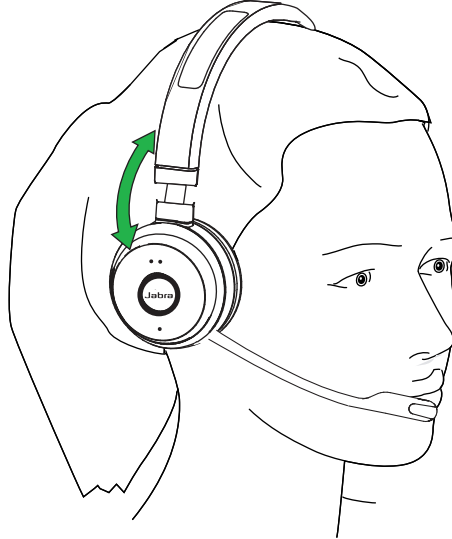


3.3 POSITION THE MICROPHONE

It is recommended to position the microphone close to your mouth (0.5 inches).




The microphone is bendable for personal preference.

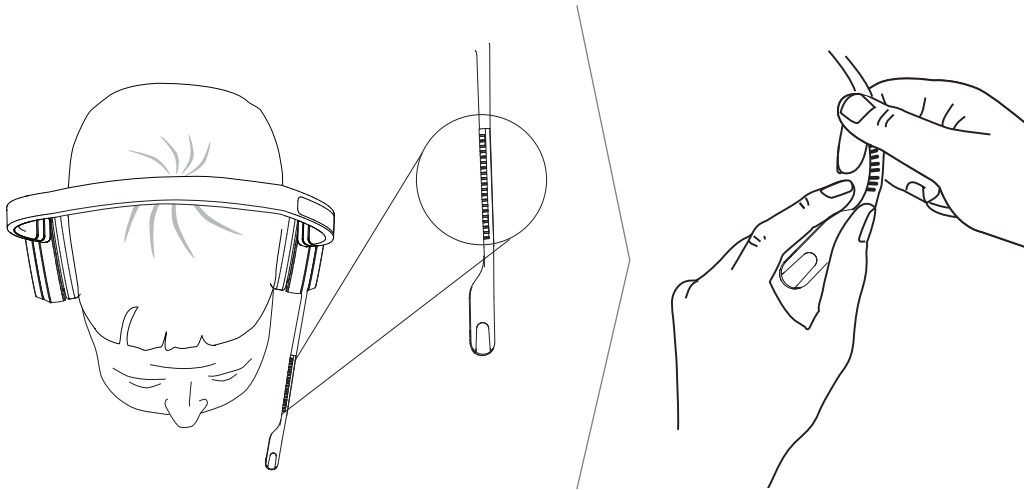

3.4 STORING THE MICROPHONE

When listening to music or outdoors, the microphone can be magnetically stored in the headband groove.

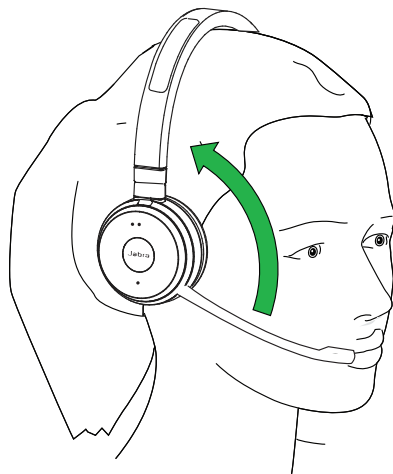


4. HOW TO CHARGE THE BATTERY

The headset battery will charge when connected to a PC using a USB cable, or when using any USB charger supplied with your mobile device.

The headset can still be used for calls while charging using a USB cable connected to a PC.


It takes approx. 3 hours to charge the battery.

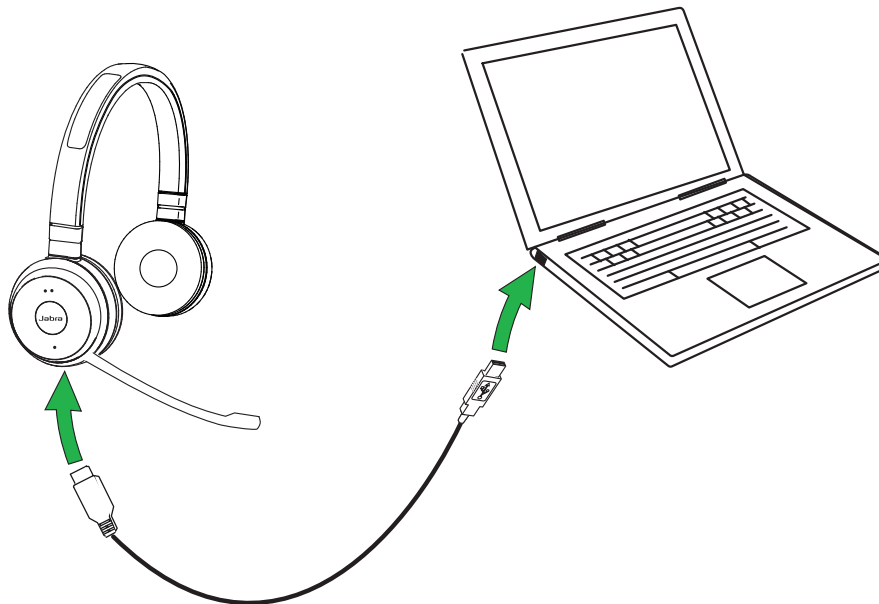

5. HOW TO CONNECT


5.1 CONNECT TO PC (USING JABRA LINK 360)

1. Ensure the headset is switched on.
2. Plug the Jabra Link 360 dongle into a USB port on your PC. The headset and Jabra Link 360 are already pre-connected.

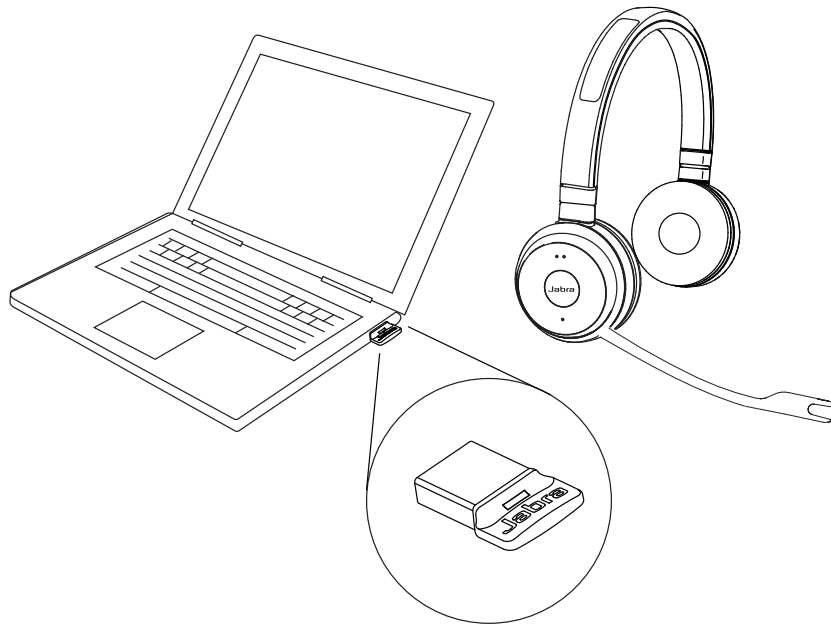


5.2 CONNECT TO MOBILE DEVICE (USING BLUETOOTH)

1. Wear the headset.
2. Hold (3 secs) the **On/off/connect** switch in the connect position until you hear the voice guided instructions. The Bluetooth indicator will flash blue.
3. Follow the voice guided instructions to connect.

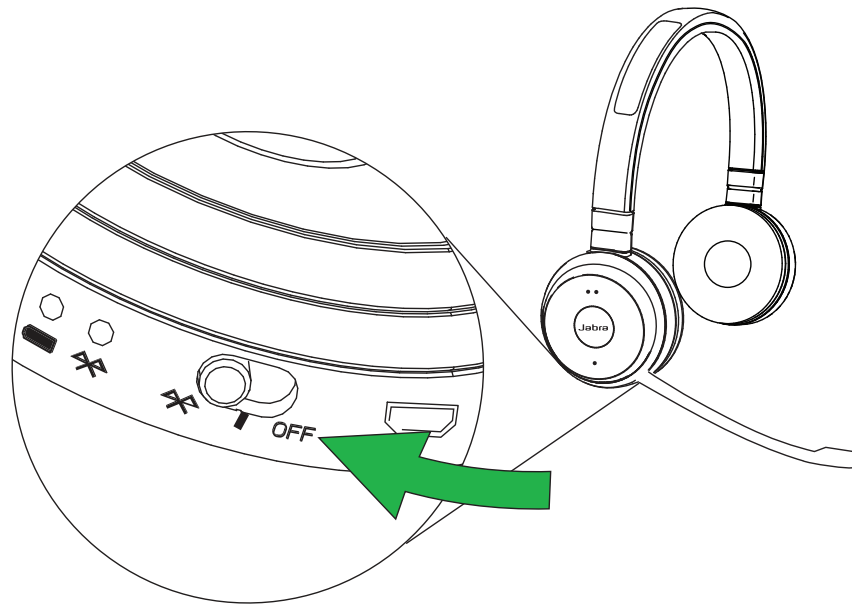


5.3 CONNECT TO PC (USING USB CABLE)






1. Ensure the headset is switched on.
2. Plug the headset into a USB port on your PC using the supplied USB cable.

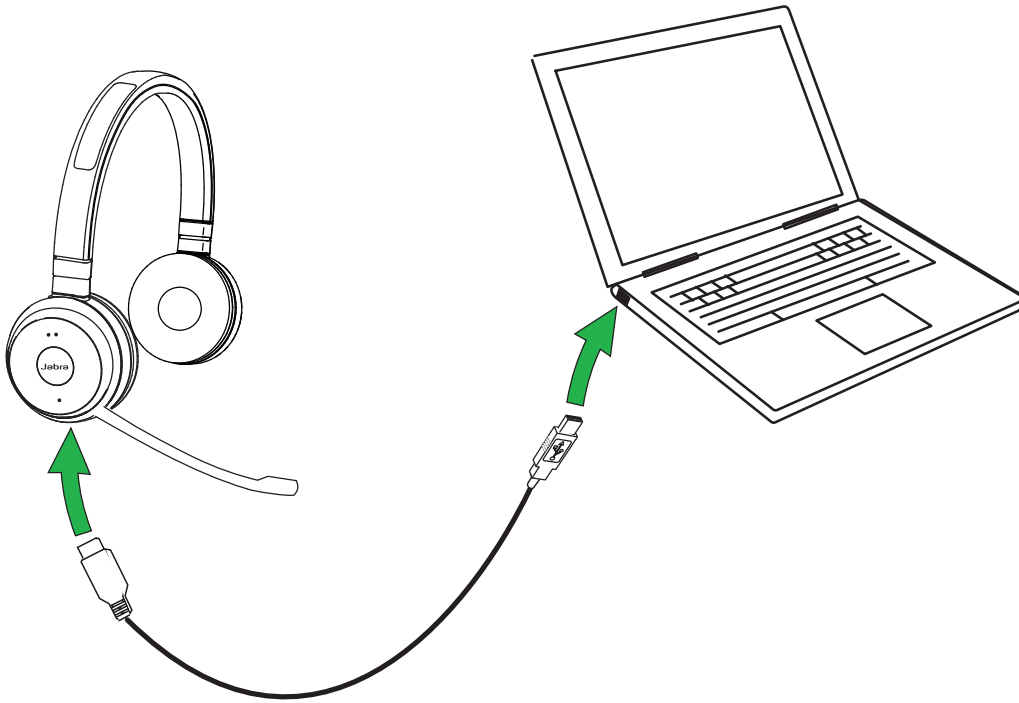

6. HOW TO USE

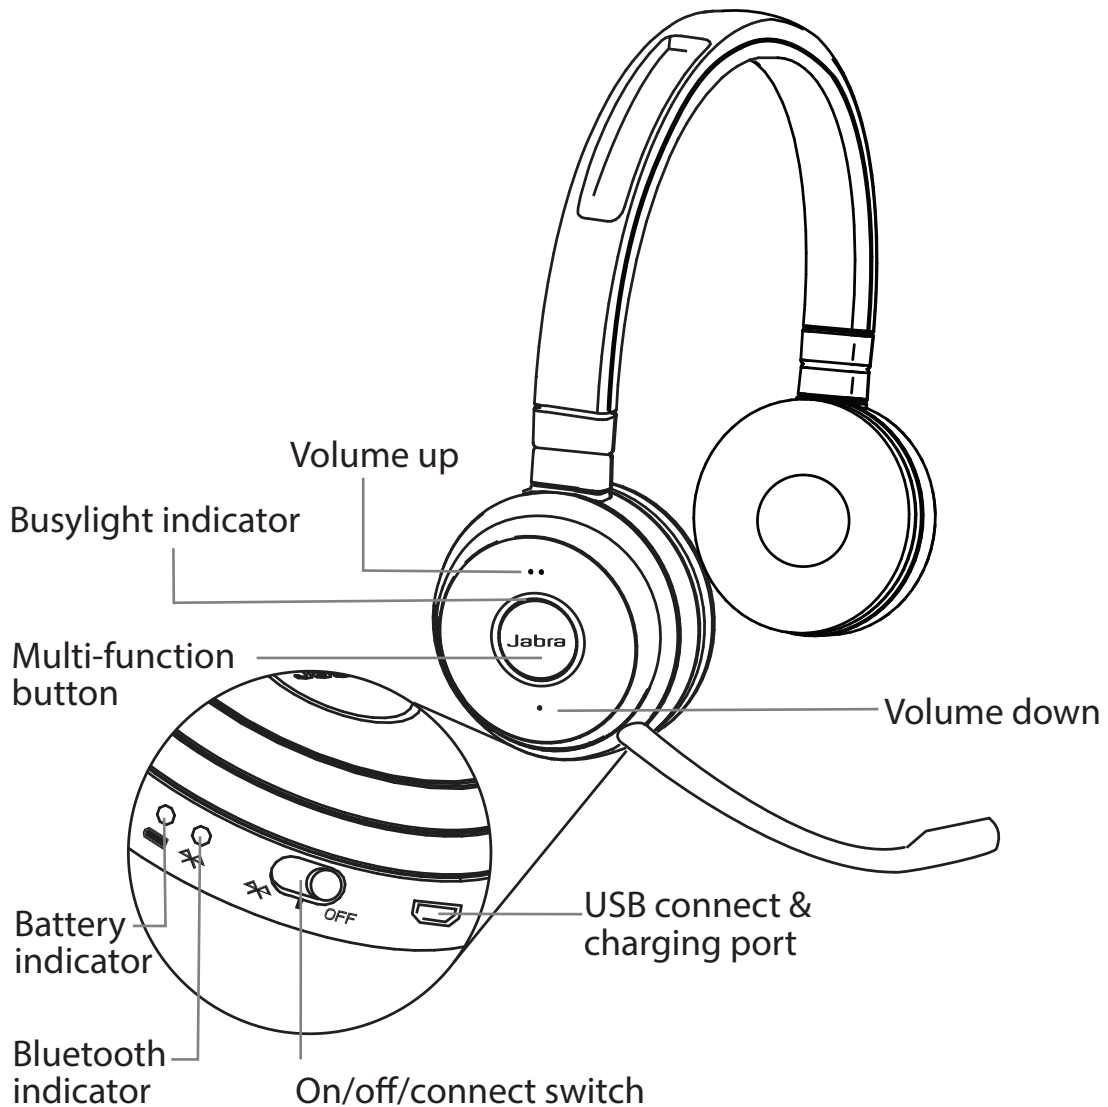


6.1 EVERYDAY USE

	FUNCTION	ACTION
	Headset on/off	Slide the On/off/connect switch
	Answer/end call	Tap the Multi-function button
	Reject call	Double-tap the Multi-function button
	Battery and connection status	Tap the Multi-function button when not on a call
	Enable/disable Voice prompts	Press and hold the Multi-function button while turning on the headset
	Adjust volume	Tap the Volume up or Volume down button
	Manual busylight on/off	Simultaneously tap the Volume up and Volume down buttons
	Enable/disable Busylight function	Simultaneously press and hold (3 secs) the Volume up and Volume down buttons
	Mute/unmute microphone	Press and hold (2 secs) the Volume down button

6.2 MULTIPLE CALL HANDLING

The headset can accept and handle multiple calls at the same time.

	FUNCTION	ACTION
	End current call and answer incoming call	Tap the Multi-function button
	Switch between held call and active call	Press and hold (2 secs) the Multi-function button
	Put current call on hold and answer incoming call	Press and hold (2 secs) the Multi-function button
	Reject incoming call, when on a call	Double-tap the Multi-function button

6.3 BUSYLIGHT


The busylight indicator on the headset can be turned on to let others know that you are busy.

MANUALLY TURN BUSYLIGHT ON/OFF

To manually turn the busylight on/off, tap both the **Volume up** and **Volume down** buttons at the same time.

ENABLE/DISABLE BUSYLIGHT FUNCTION

To enable/disable the busylight function, press and hold (3 secs) both the **Volume up** and **Volume down** buttons at the same time.

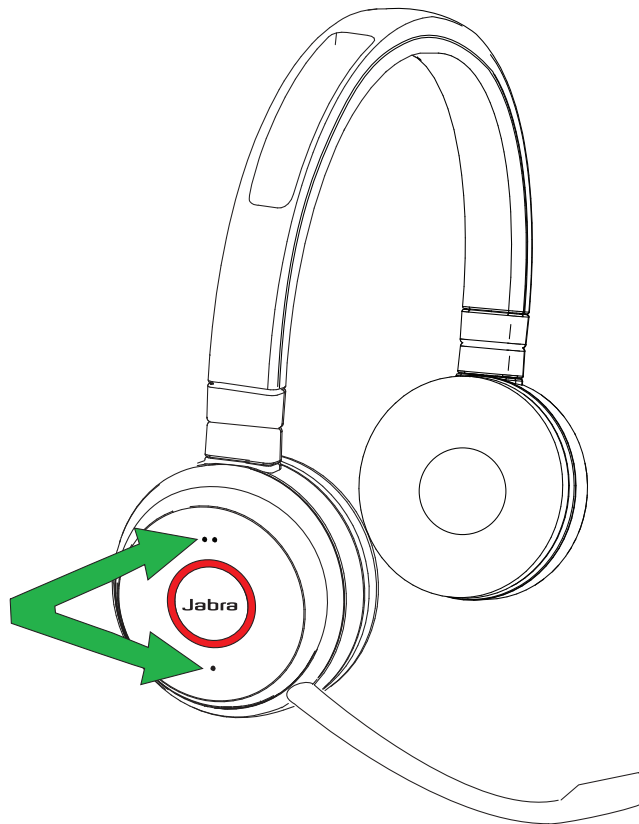

7. SUPPORT

7.1 FAQ

View the FAQs on [Jabra.com/evolve65](https://www.jabra.com/evolve65)

7.2 HOW TO CARE FOR YOUR HEADSET

- Always store the headset with the power off and safely protected.
- Avoid storage at extreme temperatures (above 55°C/131°F or below -10°C/14°F). This can shorten battery life and may adversely affect the headset.

8. TECHNICAL SPECIFICATIONS

JABRA EVOLVE 65 HEADSET	SPECIFICATION
Headset weight:	Mono headset: 79 g Stereo headset: 111 g
Headset dimensions:	Mono headset: L 154.4 mm x W 58.6 mm x H 170.4 mm Stereo headset: L 155.5 mm x W 58.6 mm x H 170.5 mm
Microphones:	Noise cancelling microphone
Speaker:	28 mm Dynamic PureSound speakers (Hi-Fi)
Speaker maximum input power:	10 mW
Speaker frequency range:	70 hz - 20 kHz
Cable length:	Controller to PC: 90 mm Headset to 3.5mm jack: 1.2 m
Operating temperature:	-10°C to 55°C (14°F to 131°F)
Storage temperature:	-20°C to 25°C (-4°F to 77°F)

BLUETOOTH ADAPTER (JABRA LINK 360)	SPECIFICATION
PC connection:	USB 2.0
Bluetooth version:	4.0
Bluetooth range:	Up to 100m (300 feet), Class 1
Bluetooth profiles:	A2DP (v1.2), Hands free profile (v1.6)
Simultaneous Bluetooth connections:	1
Bluetooth audio bandwidth	HD voice (wideband), A2DP
Visual indicators:	Multicolor LED

